



EV-24V-30D

### 24V 30W Dimmable CV DC LED Driver UL approved


- Universal AC Input 100~277V AC, 47-63Hz, Pf 0.99@120V, 0.97@277V
- DC Output: 24V (Adj. 21.5-25.5V), 30W (1.25A), Constant Voltage
- Dimmable, Suitable for Leading Edge, Trailing Edge TRIAC, MLV, ELV
- Protection: Short-Circuit / Over Load / Over Temp. Auto-recovery Mode once Fault removed
- Approvals: **UL / cUL, FCC**, RoHS, Class 2, Class P, Class HL
- Double Isolation for Safety
- Terminal Screw Connection (Input: N, L. Output: +V, -V)
- Efficiency: 79%, THD: <20% (full load)
- Input AC 0.5A@100VAC, Inrush Current 7A, 50%, 420us, Leakage Current <0.50mA
- -20C to +45C, full load, storage -40/+80C, 20 to 90% RH NC (See derating curve)
- Vibration: 10~500Hz, 2G 10min./1 cycle, period for 60min. each along X,Y,Z axes
- Standard: UL8750+UL1310. FCC Part 15 B
- Withstand I/P-O/P:1.88KVac, Isolation: I/P-O/P:100MΩ/500VDC/25°C/70%RH
- Load Regulation: +-1%, Voltage Regulation: +-0.5V
- Family of Drivers, 12 & 24V, 30W, 60W, 80W, 96W, 100W, 120W, 150W, 200W, 300W
- Size: 6.1" L x 2.12" W x 0.79" H, 155\*54\*20mm (L\*W\*H)
- Weight: 0.46lb, 0.21Kg
- 2 year warranty






**Note:**

- All parameters if NOT specifically noted are measured at 120VAC input, rated load and 25C ambient temperature.
- To extend the driver's useful life, please reduce the loading at lower input voltage

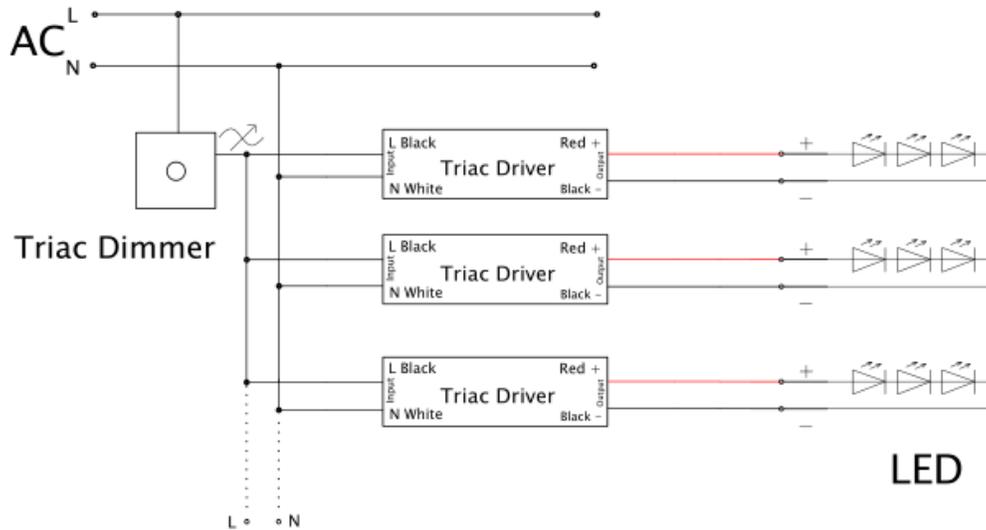

- Input terminals "Black" and "White" to connect to AC L and N.
- Output terminals "Red" to LED Positive side (+) , "Black" to LED Negative side (-)

**Derating Curve**

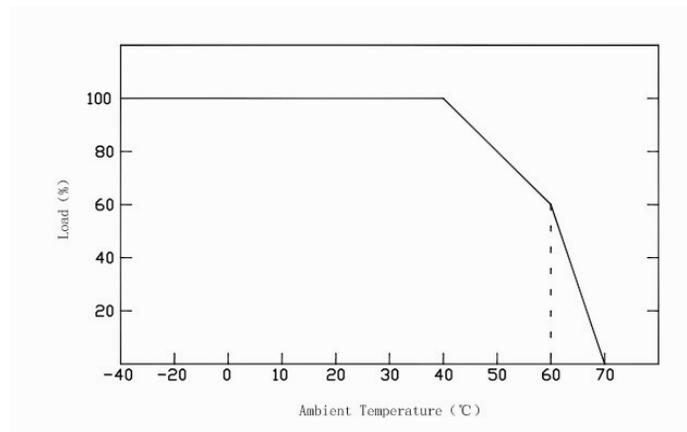

- To extend product life, please refer to the Derating Curve and derate according to the temperature
- Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation



## Dimensions

