





EV-LEDFLOOD-100W2

LED Flood Light 100W (Replace 400W-500W MH) UL Approved

- UL Approved 100W LED Floodlight, 100-277V AC
- Neutral white, 4500K, 120 degree Beam Angle, IP65 Splash Proof
- Die-Cast Aluminum Shell, Adjustable bracket for Wall Mount.
- LED Initial Flux:>9000lm, >70 CRI (USA Bridgelux LED)
- Input Voltage: AC100~ 277V / 50-60 Hz, >0.85 PF
- Operational Temp, -20C to 40C
- Dimensions: 15.08" x 11.3" x 3.9" (383 x 287 x 97mm)
- Extensive LED lifetime, up to 50,000 hours, 2 yr Warranty
- CE, ROHS, UL Approved
- Weight 12Lb 7oz

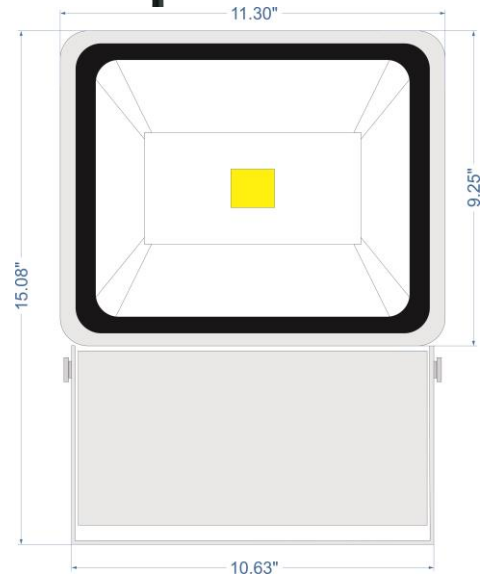


Luminance

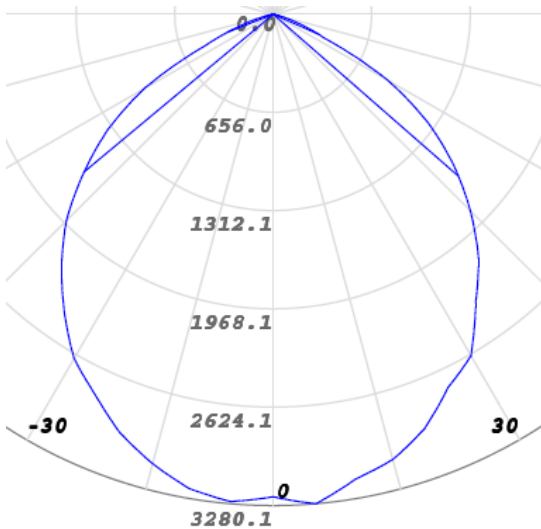

Diameter Avg.

Height

| Diameter Avg. | Height |
|------------------------|--------|
| 7.003m 128.14/357.94lx | 3.0m |
| 9.338m 72.08/201.34 lx | 4.0m |
| 11.672m 46.13/128.86lx | 5.0m |
| 14.006m 32.03/89.48lx | 6.0m |
| 16.341m 23.54/65.74lx | 7.0m |

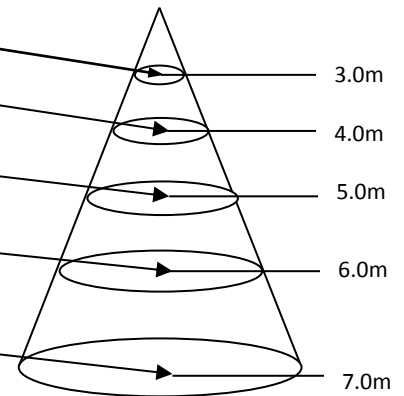

Angle:98.8deg